

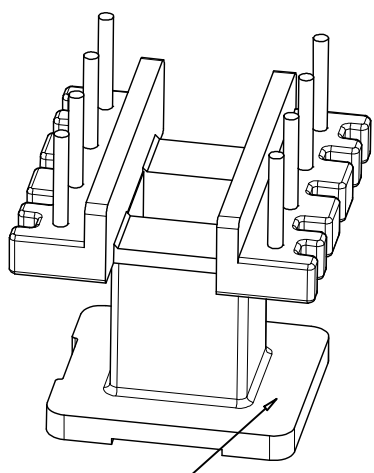
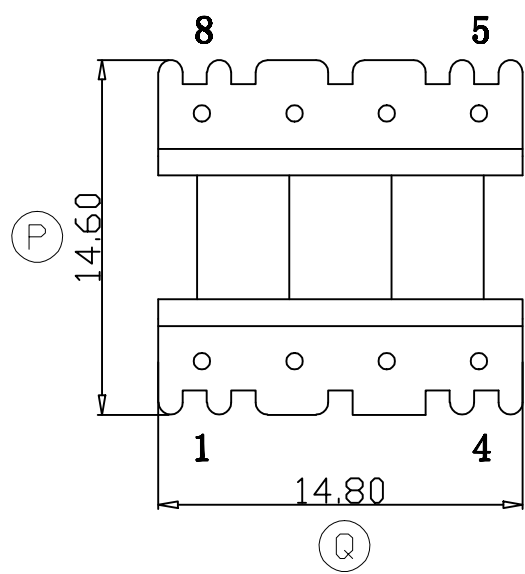
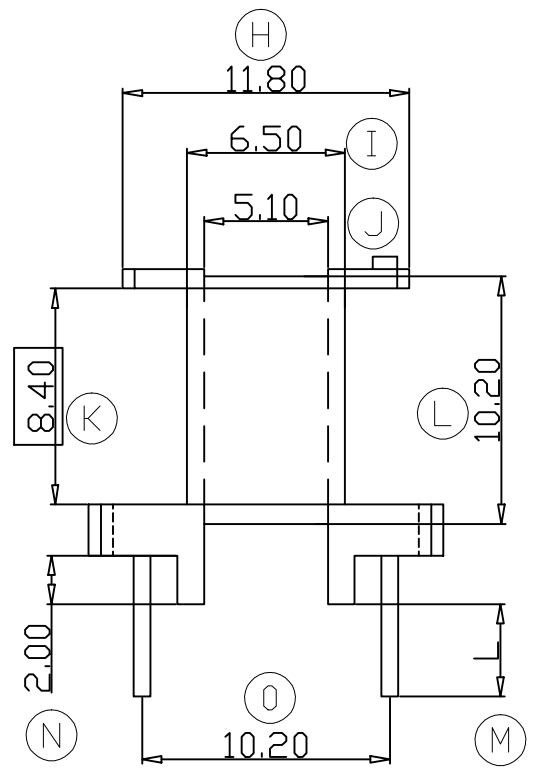


ZX-16AK

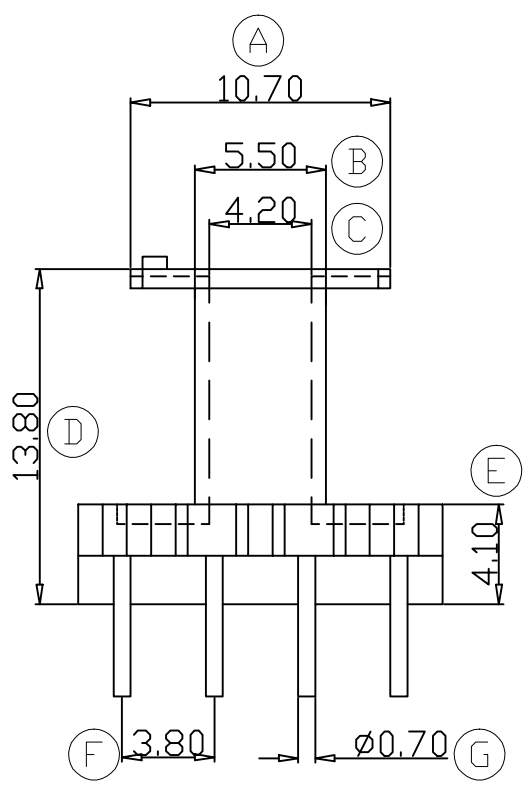

此面加胶0.50mm

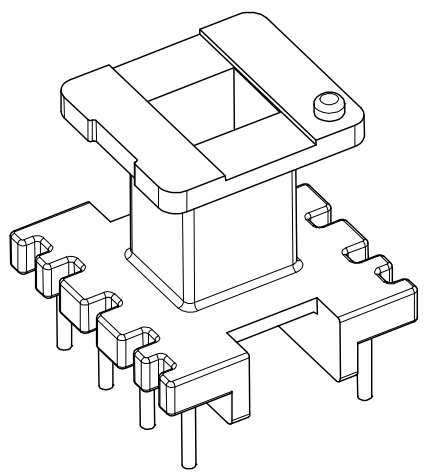

项次	REVISIONS	REC.	DATE	项次	REVISIONS	REC.	DATE
1	两挡墙加高1.00mm, 加厚0.50mm		2024.06.04	4	Ⓚ 尺寸由8.30改为8.90mm		2024.06.29
2	ⓔ 尺寸由3.10改为4.10, Ⓝ 尺寸由1.00改为2.00		2024.06.04	5	Ⓛ 尺寸由9.60改为10.20mm		2024.06.29
3	ⓓ 尺寸由13.20改为13.80mm		2024.06.29	6	加胶0.50mm, Ⓚ 尺寸由8.90改为8.40mm		2024.07.25
DRAWN & DRAFTED BY	LIU WEI QIANG	TOLERANCES		ANGLE:	EE-16(4+4P)		
CHECKED & APPROVED BY	MA BU JIAN	0<L≤4 ±0.1	pin pitch	UNIT:	BOBBIN MATERIAL:	UL REC.	
		4<L≤16 ±0.2	±0.2	MM	PHENOLIC	UL 94V-0	
		16<L≤63 ±0.3		SCALE:	PIN MATERIAL:	PIN TENSION LOAD:	
					CP WIRE	1.2KG MIN	
DATE: 2024.07.25				DRAWING NO. ZX-16AK		REV. A04	



智信电子塑胶有限公司
ZHI XIN ELECTRONICS PLASTIC CO., LTD.
TEL:0769-86389901-2 FAX:0769-86389903

